



Mounting	Floor
Voltage (V)	24VDC
Class	III
IP	65
IK	06
Power (W)	3
Energy class light source	G
Light source	COB LED
Light source included	Yes
Luminous Flux (lm)	154
Color temperature (K)	2700K
Dimmable luminaire (W)	No
CRI	>90
Suitable for seaside areas	No
Driver included	No
Recommended driver On/Off	98324031
Luminaires per On/Off driver	De 1 a 10
Recommended DALI driver	98324101
Luminaires per DALI driver	De 1 a 25
Recommended TRIAC driver	ZZNA
Recommended CASAMBI driver	98324599
Luminaires per CASAMBI driver	De 1 a 30
Cable length	500 mm
Structure material	Stainless Steel
Diffuser material	Glass
Structure finish	Black
Diffuser finish	Transparent

 Installation instructions

 Energy label

 Photometric

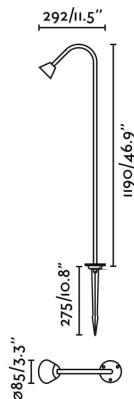

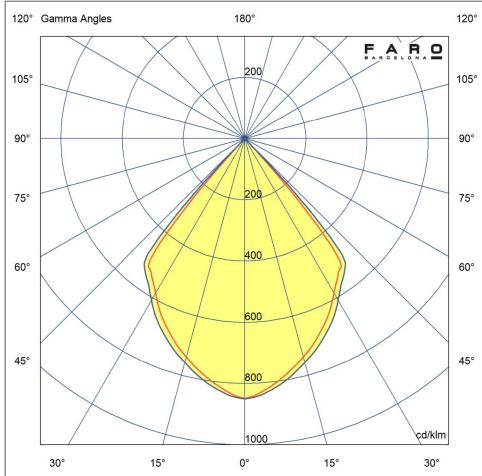

**Recommended Drivers**

Power Supply 24Vdc 30W IP67

Reference	98324031
Voltage (V)	24VDC
IP	67
Power (W)	30
Control System	on/off



Power Supply 24VDC 120W 5A CASAMBI

Reference	98324599
Voltage (V)	24VDC
IP	20
Power (W)	120
Control System	Casambi





